

# CAN STORAGE



**ALL WELDED  
ALUMINUM CONSTRUCTION**


All welded construction insures long and dependable service of each rack.

ITEM NO.:

QUANTITY:

JOB NAME:

SPEC NO.:

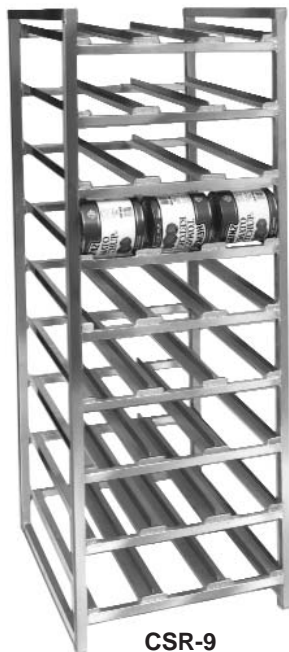

CSR-9



CSR-4M

**Applications:** Can holding, storing and organization. Inclined angle and T-Bar guides provides easy access for can selection, rotation and inventory control. Holds both #10 and or #5 cans. Front or rear loading. First in first out when loaded from rear.

**Construction:** Heavy duty, high tensile, extruded aluminum. Type 6063-T5 alloy. Features a life time guarantee against rust . Shipped assembled for immediate use

**Can Slides:** Sides are 1" x 1-1/2" extruded aluminum angle and T-bar heli-arc welded to frame. Bottom load ledge design.

**Frame and Cross Supports:** Vertical and horizontal frame sections are 1-1/4" extruded aluminum tubing.

**Casters:** 5" diameter, full swivel design. Non-marking thermoplastic rubber wheel on mobile models.

**Load Rating:** High.

**Spacing:** See tabulation.



**Can Accommodations:** See tabulation.

**Options:** Caster Brakes (011)

| Model  | Capacity                 | H   | W       | D   | Wt. |
|--------|--------------------------|-----|---------|-----|-----|
| CSR-9  | 162 - #10 can Stationary | 76" | 25 1/2" | 35" | 53  |
| CSR-9M | Mobile                   | 82" | 25 1/2" | 35" | 65  |

| Model   | Capacity                  | H   | W       | D       | Wt. |
|---------|---------------------------|-----|---------|---------|-----|
| CSR-4M  | 72 - #10 can Aluminum Top | 43" | 25 3/4" | 35 1/4" | 43  |
| CSR-4MP | Poly Top                  | 43" | 25 3/4" | 35 1/4" | 57  |
| CSR-4MS | Stainless Top             | 43" | 25 3/4" | 35 1/4" | 48  |

| Model   | Capacity            | H   | W       | D       | Wt. |
|---------|---------------------|-----|---------|---------|-----|
| CSR-3   | 54 - #10 can No Top | 34" | 25 3/4" | 35 1/4" | 30  |
| CSR-3M  | Aluminum Top        | 34" | 25 3/4" | 35 1/4" | 39  |
| CSR-3MP | Poly Top            | 34" | 25 3/4" | 35 1/4" | 53  |
| CSR-3MS | Stainless Top       | 34" | 25 3/4" | 35 1/4" | 44  |



Inclined can guides provide easy access and facilitate stock rotation when loaded from rear.



Check the latest NSF listing for a complete list of all NSF items

Specifications subject to change.



Toll Free: 866-712-7283 • Fax 516-944-0625  
55 Channel Drive • Port Washington, New York 11050