

Item No. _____

Quantity _____

Job Name _____

Spec No. _____

Box Transport Truck

ALUMINUM CONSTRUCTION

Material:

Hi-tensile, corrosion resistant, rust proof, primary extruded aluminum, Type 663- T5 alloy.

Construction:

All heli-arc welded all sealed (no rivets).

Base:

Perimeter frame of 1-1/2" x 1-1/2" x .070 wall extruded aluminum tube with 1-1/2" x 1-1/2" laterals welded at 3-7/8" intervals.

Uprights:

1-1/2" x 1-1/2" x .070 wall extruded aluminum tube with horizontal braces of 1-1/2" x 1-1/2" wall extruded tubing and welded securely to the base.

Upper Shelf:

Frame length consists of 1-1/2" x 1-1/2" aluminum tube and frame width consists of 1-1/2" x 1-1/2" aluminum tube with 1-1/2" x 1-1/2" aluminum tube laterals welded to length of frame on 3-7/8" intervals.

Casters:

Four platform type 5" casters, two rigid and two swivel with brake... all with ball bearing axle, and non-marking wheel.

Mobile Dunnage Dolly

ALUMINUM CONSTRUCTION


Specifications:

- 5" X 1-1/4" heavy duty plate casters for extra strength
- 1200 lbs. distributed weight capacity

Options:

Corner Bumpers /024

Other Options Available

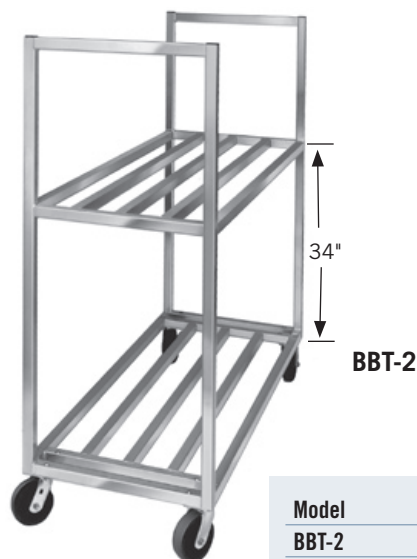

Model	H	W	D	Weight
BBT-2	67 1/2"	27"	60"	68



Optional:
5" x 2" HD Casters
(/052) 2000 lbs.
Weight Capacity

Model	H	W	L	Weight
MD2036CA	8"	36"	20"	31
MD2048CA	8"	48"	20"	33
MD2060CA	8"	60"	20"	36
MD2436CA	8"	36"	24"	32
MD2448CA	8"	48"	24"	34
MD2460CA	8"	60"	24"	37

Custom Sizes
Available

SOLID TOP

Model	H	W	L	Weight
AD2428	8"	28"	24"	23
AD2433	8"	33"	24"	27
AD2440	8"	40"	24"	32